


ELECTRIC BOLT

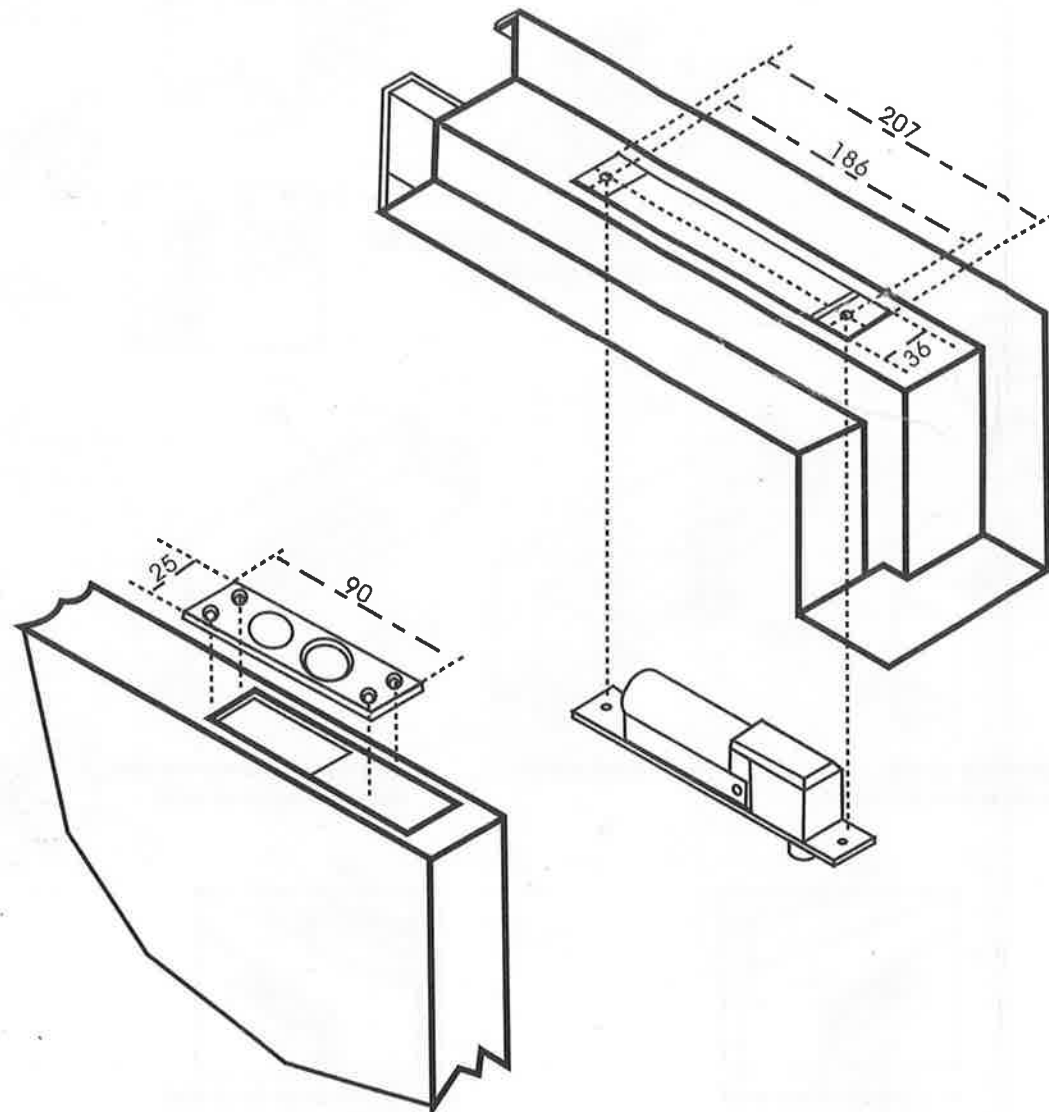

low temperature standard electric bolt

1. Specification:
 standard voltage: 12VDC 1A
 Red---Positive (+) Black---negative (-)
 voltage: start 950mA. Standby 100mA.
 solenoid: super low temperature continuous duty.
 fail safe: locked when energized, power to locked, fail unlocked.
 protecting designed:
 Bolt dimension : 16mm DIA , stainless steel : 16mm throw.
 cutout : 207mm(L)x36mm(W)(40mm back set minimum must be present)
 cover plate : 215mm(L)x41mm(W)x0.5mm(D).
 face plate : 205mm(L)x35mm(W)x3mm(D).
2. Signal statue:
 door status sensor: indicates the door is open or closed .
 white wire : NC normally close.
 note : the signal current/voltage through recon enginery can not exceed 0.5AMP , 30VAC/DC.

The excellence of our electric bolt

1. excellent designed ,solid and durable ,100% safe.
2. up to date design ,super low use, continuously work.
3. low temperature design;more safe, credible,durable.
4. professinal electrical locks, exellent manufaceure.
5. authoritative attestation: MA, CE
6. high grade material, exquisite producting ,varranty :2 years.
7. prodolcts are popular in the world ,and cooperate with great manufactures.

Installation Board Schematic

Below is the installation picture of five kinds of electric bolt please follow it to install

	A	B	C	D	E
YB-100	207	36	12	91	26
YB-200	207	36	12	91	26
YB-300	207	36	12	91	26
YB-500	207	36	12	101	36
YB-700	207	31	12	101	26

