


Receiver Parameter:


- Compatible Remote: M1/M2/M3/M5/M6/M7
- Power Input: DC12V~DC24V
- Output: Max 3Ax3CH
- Power: Max 108W(12V)/216W(24V)
- Working Temp.: -30°C~55°C
- Dimensions: L135×W30×H20(mm)
- Weight(N.W.): 47g



Remote Control Parameter:

- Working Voltage: 3V (battery CR2032)
- Working Frequency: 433.92MHz
- Remote Distance: 40m~50m
- Working Temp.: -20°C~55°C
- Dimensions: L93×W60×H8(mm)
- Weight(N.W.): 42g

Wiring Diagram:

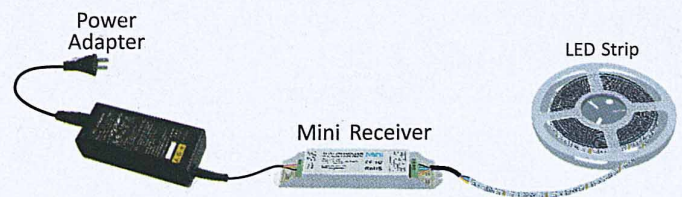

Total Weight(G.W.): 120g

The Learning ID Method of Remote Control:

Remote control has been matched to the receiver before leave factory, if deleted accidentally, you can learn ID as follow.

Learning ID: Press ID learning button on the receiver until the running light is on, then press any key on the remote control, the running light flashes several times, activated.

Cancel ID: Press ID learning button on the receiver for 5 seconds.

Model of RF Remote:

