

**LED Steuermodul zum dimmen mit 0-10V
für 12 – 48 VDC LEDs, max. 10A**

LTNGLT*D10CC



D10CC developed a new 0/1-10V to PWM dimming driver which has solved the compatible problem of the fluorescent dimming system and the LED illumination. LED lamps can be controlled by many traditional intelligent dimming systems such as Lutron, Dynalite, Tridonic, Schneider, Clipsal, Osram, Philips, ABB, etc.

D10CC is compatible with the active/passive 0-10V, 1-10V and the PUSH BUTTON insert dimming, optional with 3 in 1 current 350mA/700mA/1050mA, Support a wide range of the connection of 1~13pcs (1~50W) high power LED and ensure accurate current output automatically. With above advantage, one D10CC could be the substitute of more than 10 models in the same kind, make it much more convenient for sales and installations.


D10CC 0-100% PWM dimming, output with the dimming curve that is more palatable to human vision, provide the user with more comfortable and natural lighting experience.

* By working with our CV 0/1-10V dimming driver D10CC the basic issue that related LED projects and needs 0/1-10V dimming can be solved.


1. Product Parameter:

D10CC 0/1-10V LED Dimming Driver	
Signal Input	0-10V, 1-10V, PUSH BUTTON
Power Supply Chosen	DC CV SMPS
Input Voltage	DC12V~DC48V
Output Voltage	DC3V~DC46V
Output Current	CC350/700/1050mA×1CH
Driving LEDs	1~13pcs 1W/3W/5W LED(1~50W) in series
Dimming Range	0~100%
Temperature Range	-30℃~55℃
Product Size	L175×W44×H30(mm)
Package Size	L178×W48×H33(mm)
Weight(G.W.)	125g

2) Connection Diagram for Low Power LED 5050,3528 :

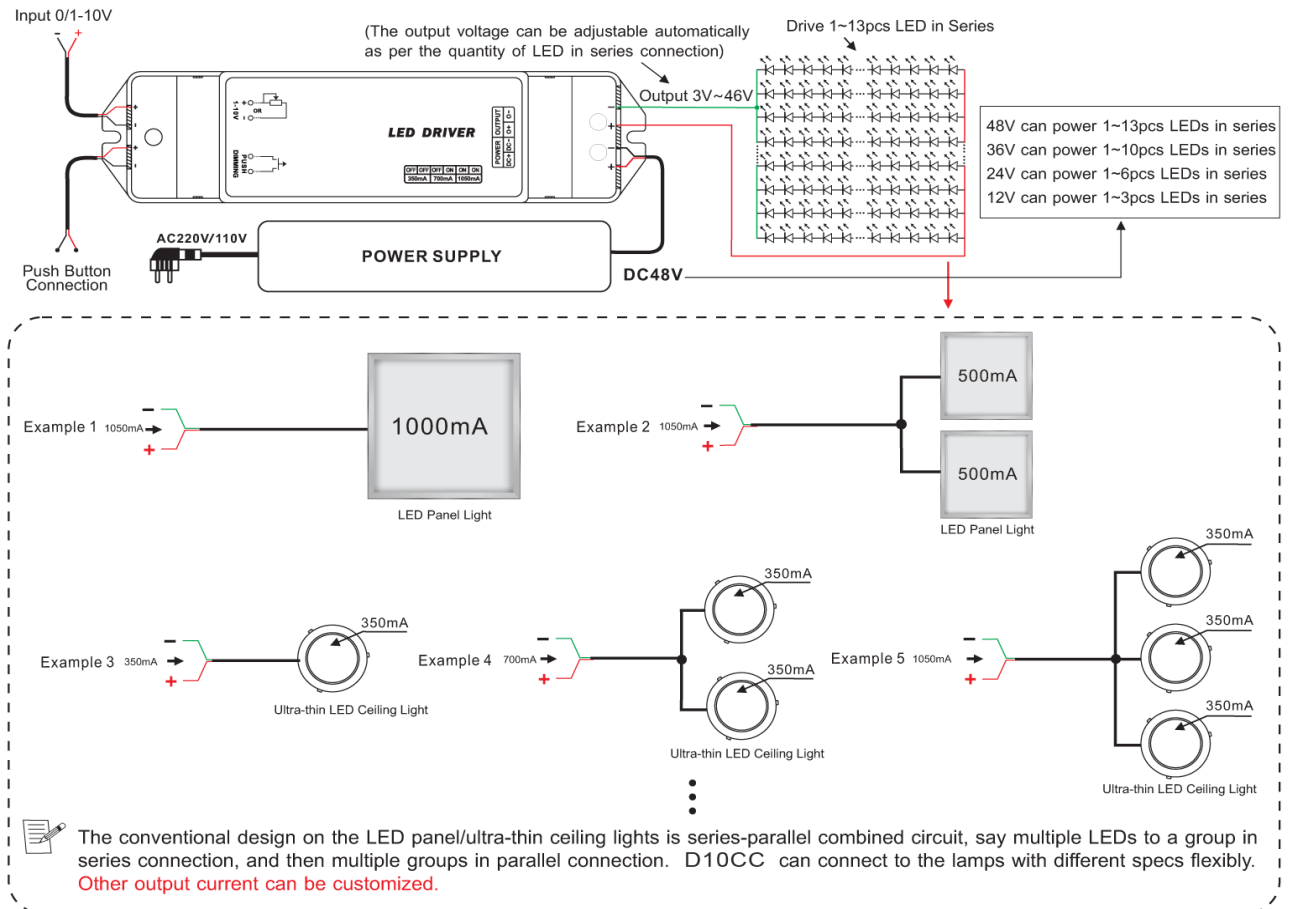

3) System Connection Diagram:

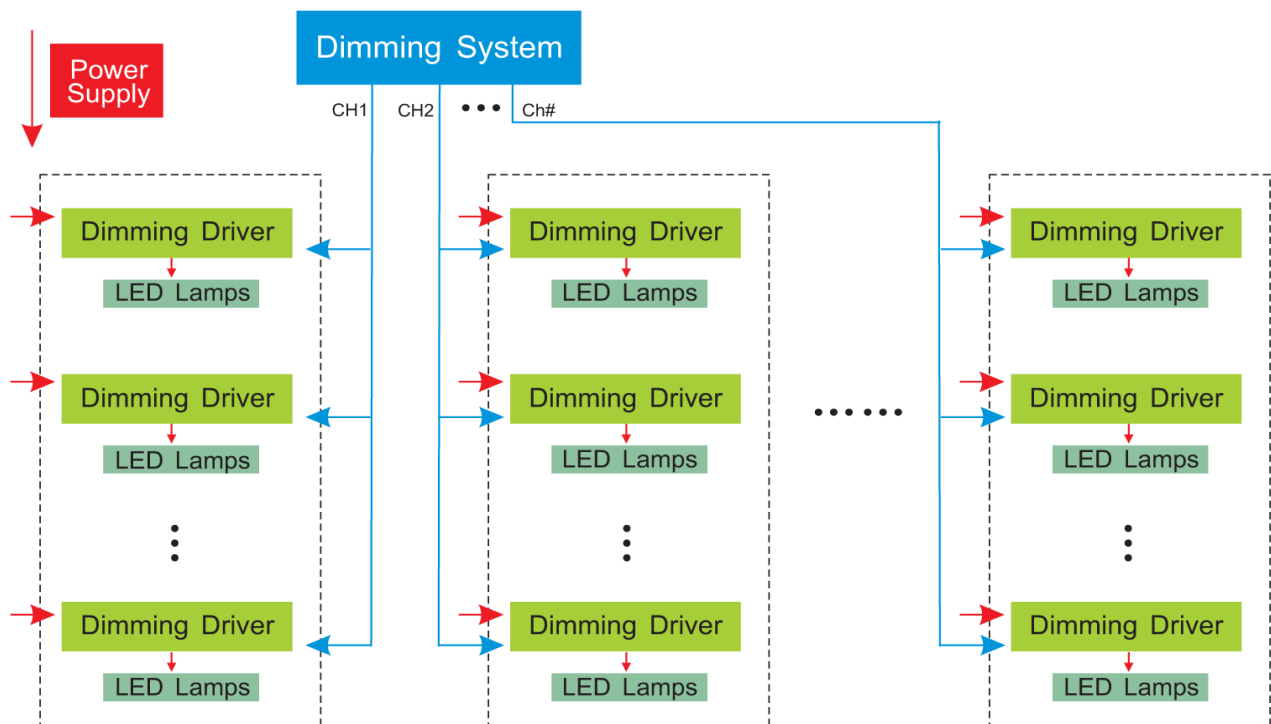

4. Attention:

- 1) The product shall be installed and serviced by a qualified person.
- 2) This product is non-waterproof. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6) Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7) If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.